



## GAME GARDENS

Tornado Wire Ltd

SALES: Waterloo Road Estate • Bidford-on-Avon • Warwickshire • England • B50 4JH

Tel: +44 (0) 845 071 0890 • Fax: +44 (0) 845 071 0891 • sales@tornadowire.co.uk • www.tornadowire.co.uk

Protect your livestock from escape or harm with our range of innovative high tensile fencing.

Stockist address:

Deer farmers all over the world know that running a game farm requires considerable financial investment, and that the best fencing is essential for protecting livestock from escape or harm.



Tornado Game Garden fencing is produced in the following standard specifications, other heights and mesh sizes can be manufactured on request. **Please contact us for further information.**

"As the longest established deer farmer in the UK and an international deer consultant, I am happy to endorse the quality of the products supplied by Tornado. We have used their products extensively on the farm here for many years, during which time I have never had cause for complaint of any kind. When I choose deer fencing it must be of the highest quality and in particular it must provide a highly cost-effective deer-proof barrier. Apart from the high quality of the products I have found that the service from Tornado is second to none."

**Dr T. J. Fletcher, Reediehill Deer Farm, Fife, Scotland**



Tornado Deer Fencing, made from Hi-Tensile Plus®, has been the first choice for deer farmers throughout Europe for more than 25 years. Offering unrivalled strength, it provides a secure boundary and even protection from predators when dug in and enhanced with electrified lines wires.

We offer a range of specifications specially designed for different environments and applications. Fences with larger vertical spacings (22-30cm) can be used for internal separation, whereas smaller vertical spacings (8-15cm) are recommended for perimeter fence lines.



Tornado Deer Fencing is now also available in Titan Light (recommend for internal division fencing only), which uses a smaller 2.00mm diameter wire for an economical alternative to traditional Titan products.

### Features

- Hi-Tensile Plus® delivers durability and strength
- Titan Light provides a high-quality, low-cost option for paddocks
- A choice of heights and specifications ensure tailored, cost-effective solutions
- Available in Tornado Titan joint or Tornado Flex joint

### Finish

Heavily galvanised to BS EN 10244 Class A

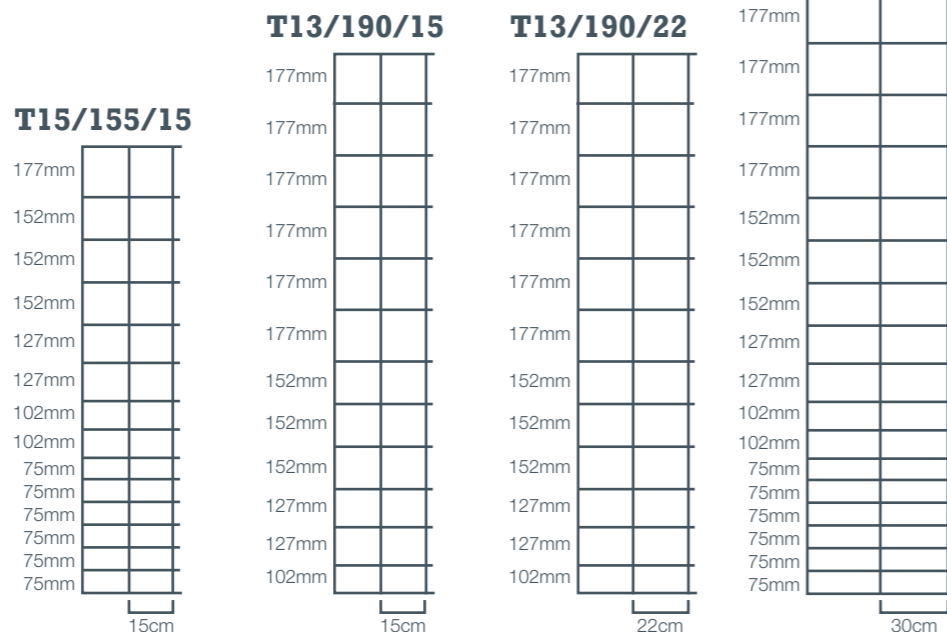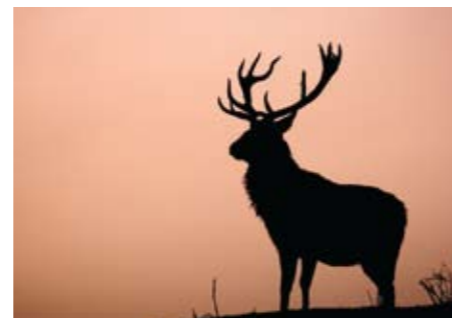

Careful planning is required before deciding where to site your fences. Avoid sharp corners where animals can become trapped. If adult males have

to be placed in adjacent fields you should consider using a double fence to prevent them fighting through the fence, and the same applies if wild deer are present

outside the boundary fences. Tornado is well placed to offer expert project assistance and the very best advice on planning and erecting should you require it.

Net Style	No. of Line Wires	Top & Bottom Line Wire Dia (mm)	Intermediate Line Wires Dia (mm)	Distance between Vertical Wires (cm)	Roll Height (cm)	Roll Length (metres)	Avg. Roll Weight (kg)
T13/190/15	13	2.50	2.50	15	190	100	125
TL13/190/15 *	13	2.00	2.00	15	190	100	88
T13/190/22 >	13	2.50	2.50	22	190	100	109
T15/155/15 *	15	2.50	2.50	15	155	100	129
T16/200/30 >	16	2.50	2.50	30	200	100	103
T17/190/15	17	2.50	2.50	15	190	100	149
TL17/190/15 *	17	2.00	2.00	15	190	100	106
T17/190/22 >	17	2.50	2.50	22	190	100	129
T17/190/30	17	2.50	2.50	30	190	100	110
T17/200/15 > *	17	2.50	2.50	15	200	100	151
TL17/200/15 >	17	2.00	2.00	15	200	100	107
T17/200/30 >	17	2.50	2.50	30	200	100	109
T18/208/15	18	2.50	2.50	15	208	100	159
TL18/208/15 *	18	2.00	2.00	15	208	100	113
T18/208/30	18	2.50	2.50	30	208	100	117
T20/244/15	20	2.50	2.50	15	244	100	180
TL20/244/15 *	20	2.00	2.00	15	244	100	128
T20/244/30 >	20	2.50	2.50	30	244	100	131
T21/244/15 >	21	2.50	2.50	15	244	100	186

Technical Specifications

None of the above will offer protection from Predator Animals such as Wolves unless they are dug in and enhanced with Electrified Line Wires

KEY: > Special Item  
50mtr rolls can be produced as special.  
\* recommended for internal paddocks only.

- Lower height fencing specs can be used for internal paddocks.
- Smaller vertical mesh is recommended for turning areas and raceways

