

### Overview

T20/244/15 is a full height one-piece deer net. The 244cm height of the fence creates a highly secure barrier; it is ideal for use in areas where deep, compacted snow may allow deer to jump over a lower fence, or where additional security is required. The Titan knot helps create a highly visible barrier, with solid vertical wires for increased net strength. Tornado Titan Deer Fence is manufactured with high tensile wire which strains tighter than mild steel and so requires fewer intermediate posts, making it quicker to erect. It does not stretch with weathering so does not need to be retightened annually.

### Compliance with British and European Standards

BSEN 10218 - Steel Wire and Wire Products part 2 - General Wire Dimensions and Tolerances.

BSEN 10223 - Steel Wire and Wire Products for Fencing and Netting part 5 - Steel Wire Woven Hinged Joint and Knotted Mesh Fencing.

BSEN 10244 - Steel Wire and Wire Products Non-ferrous Metallic Coatings on Steel Wire part 2 - Zinc or Zinc Alloy Coatings (all Tornado products galvanised to class A).

### Sustainability

All Tornado products are 100% recyclable.

### Traceability

This fence is batch marked and can be traced back to point of manufacture.

### Installation Guidelines

A straining post is required at every major change in direction or any termination and should be supported by a strut or box assembly. Netting should be tied off on the straining posts by hand or with suitable joiners. When tensioning the fence the 'crimp' in the net should be reduced by approx: 50%. Avoid driving staples tight against the wire as this will damage the galvanised coating. Plain wire or electrified wire can be added to the top of the fence if required.

### Health and Safety

It is recommended that safety gloves, boots and glasses are worn at all times when handling the product.

### Suitable for

- Deer Farming
- Perimeter Fencing

### Specification


No. of Line Wires	20
Overall Height (cm)	244
Distance between stay wires (cm)	15
Top & bottom line wire specification	2.5mm dia - 1235-1390 N/mm <sup>2</sup>
Intermediate line wire specification	2.5mm dia - 1235-1390 N/mm <sup>2</sup>
Vertical stay wire specification	2.5mm dia - 695-850 N/mm <sup>2</sup>
Average Weight per 100 Metre Roll (kg)	180.69
Material Composition	Heavily galvanised steel wire

### Product Codes

TZST202401	100 metre roll
------------	----------------

All measurements are approximate. It is the user's responsibility to check the product is suitable for the application. We reserve the right to change specifications without notification.

### Fence Layout Detail

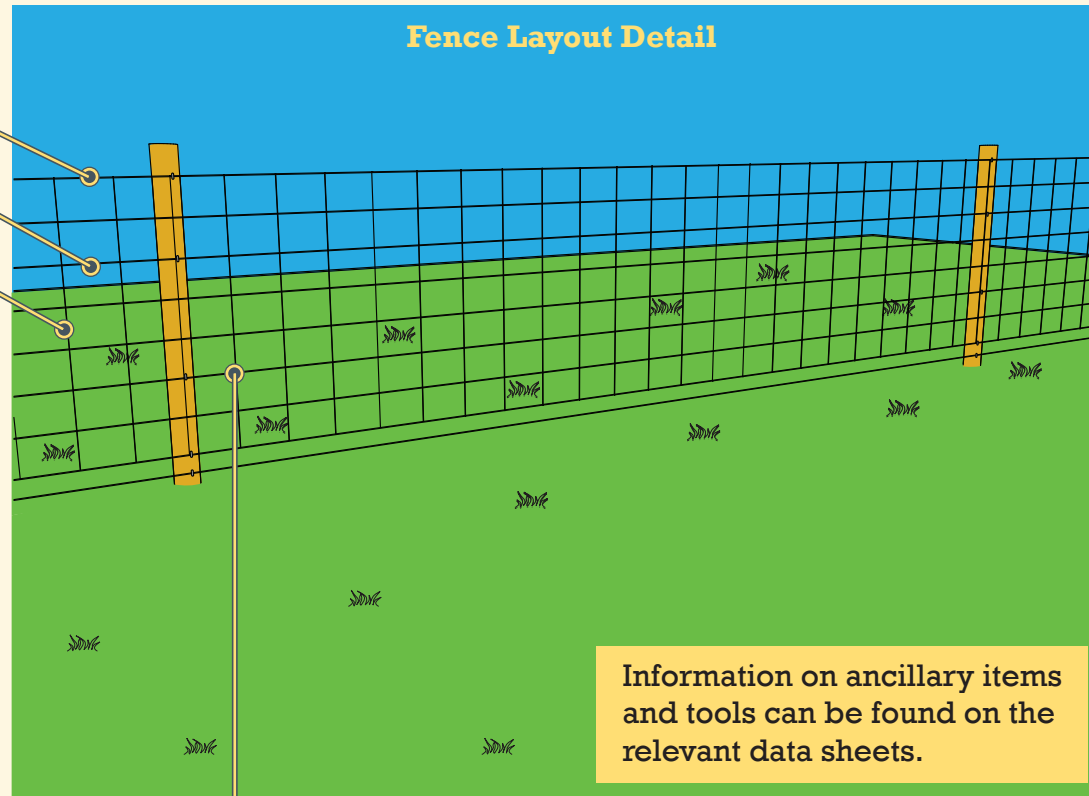


Information on ancillary items and tools can be found on the relevant data sheets.

### Line Wire Detail


		177mm
		177mm
		177mm
		177mm
		177mm
		177mm
		177mm
		152mm
		152mm
		152mm
		127mm
		127mm
		102mm
		102mm
		76mm
		76mm
		76mm
		76mm
		76mm
		76mm

|| 150mm || 150mm ||

### Fence Configuration Detail

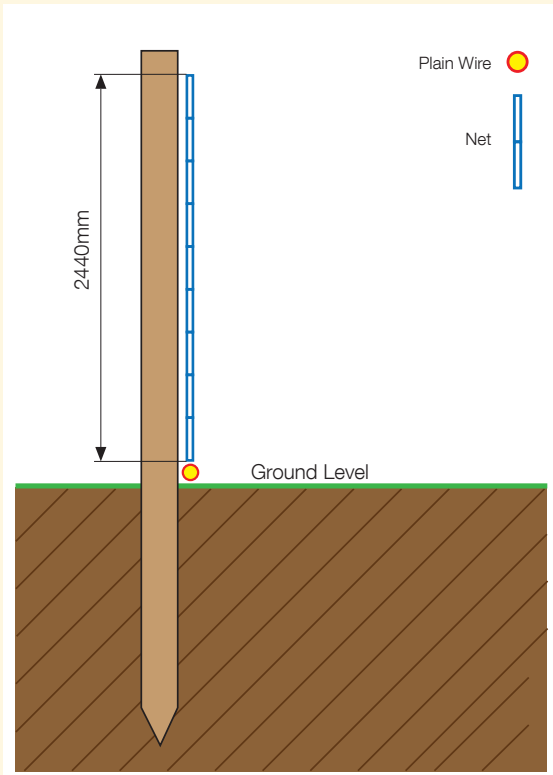

### Titan Knot



The Tornado Titan joint is an innovative non-slip knot incorporating a continual vertical stay wire. It has exceptional impact resistance making it ideal for high pressure applications.

### Related Products

- Plain wire
- Deer gates
- Badger gates
- Staples
- Stock-ade staple gun
- Range of fence installation tools